

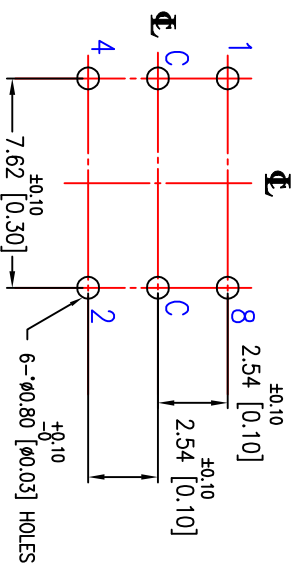
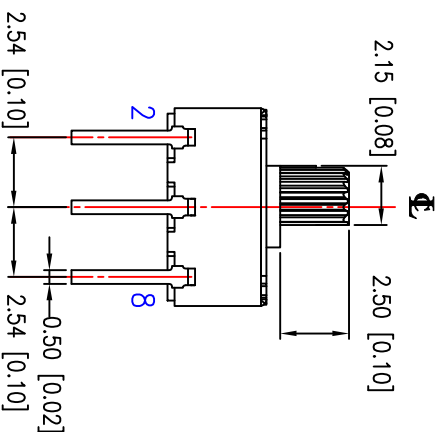


- SPECIFICATIONS:
1. RATING: 50VDC 100mA.(Max), 20VDC 1 $\mu$ A.(Min)
  2. CONTACT RESISTANCE: 100m $\Omega$ .(Max)
  3. INSULATION RESISTANCE: 100VDC-1000M $\Omega$ .(Min)
  4. DIELECTRIC STRENGTH: 250VAC-1MINUTE.
  5. ROTARY TORQUE: 40~200gf/cm.
  6. TOTAL ROTARY ANGLE: 360°. (16 STEPS)
  7. LIFE CYCLE: 10,000 STEPS.
  8. DEGREE OF PROTECTION: IP65.

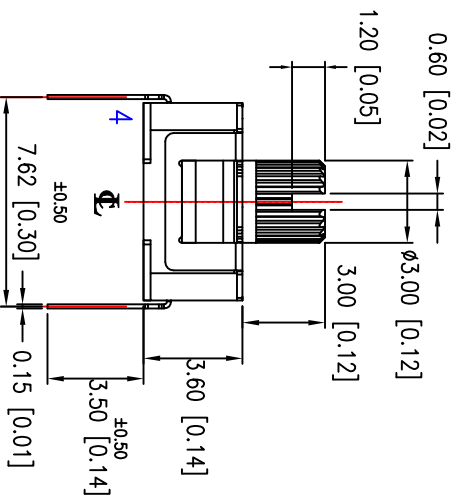

CODE		POSITIONS	
1	2	3	4
0	●	●	●
1	●	●	●
2	●	●	●
3	●	●	●
4	●	●	●
5	●	●	●
6	●	●	●
7	●	●	●
8	●	●	●
9	●	●	●
A	●	●	●
B	●	●	●
C	●	●	●
D	●	●	●
E	●	●	●
F	●	●	●

CIRCUIT CHART



NO.	PART NAME	MATERIAL	Q'TY	FINISHING
1	HOUSING	PA+G	1	
2	COVER	SUS	1	
3	ROTOR	LCP+G	1	
4	TERMINAL	PBS	6	AU PLATED
5	CONTACT PLATE	BeCu	1	AU PLATED
6	O-RING	SILICONE RUBBER	1	
7	SPACER	SUS	1	

东莞市创恩电子有限公司

SIGNATURES		TITLE	
DRAWN	aber	DATE	Mar 03
CHK'D			
APPV'D			
TOLERANCES UNLESS OTHERWISE SPECIFIED		ROTARY CODED SWITCH	
LINEAR: ±0.30 ANGULAR: ±3°		RCS-FRCHN	
REVISIONS	SCALE	NO.	
A	5/1		

DISCRIPTION	DATE	APPROVED